

# OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 18 TOWNSHIP 15 RANGE 5

DATE: 7-8-02 8-1-07



PARTY CHIEF: Wilcoxon

CREW: \_\_\_\_\_

TYPE OF MARKER: Harrison

METHOD OF ESTABLISHMENT: County: 7-6-97

NOTE: this corner position represents a title corner and may not necessarily be in the position of the record corner.

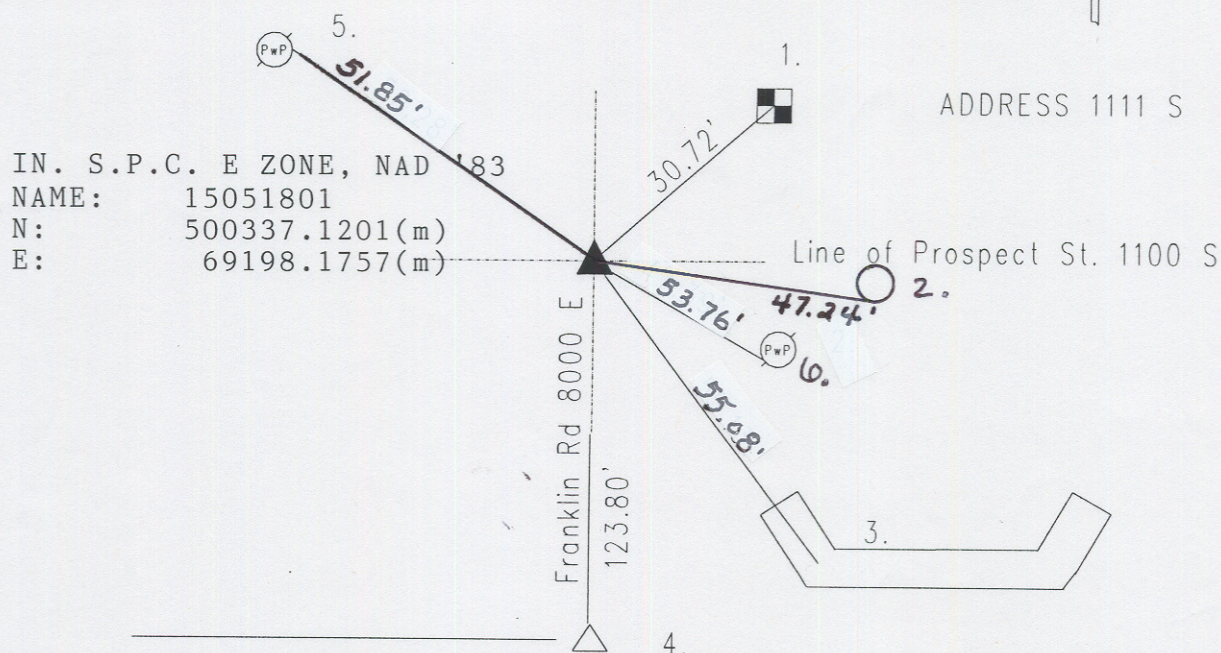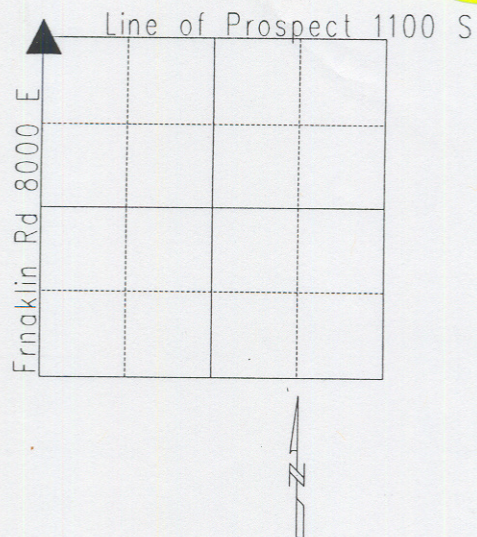

IN. S.P.C. E ZONE, NAD 183

NAME: 15051801

N: 500337.1201(m)

E: 69198.1757(m)

Original post set 1820 by Hendricks with witnesses: 8" ash N 7 W 18 links; 7" dogwood S 61 E 17 links per Marion County Atlas pg. 14. Hosbrook 4-23 & 24-1855 called rock with witness: 20" oak N 37 W 18 links, 30" elm N 19 W 65 links per Warren Township Legal Survey Book pg. 33. McConahay 8-30-74 called PK nail. Greene 4-12-93 called the same. Excavated by Wilcoxon 7-2-97 and 5/8" rebar found 10" down. Harrison set. Re-tied 7-8-02 by Wilcoxon. 15051801

| REF. | DISTANCE | DESCRIPTION   |
|------|----------|---|
| 1.   | 30.72'   | Cut 'x' center of county benchmark                              |
| 2.   | 47.24'   | PK nail w/shiner SW PwP#77-580 20"up                            |
| 3.   | 55.08'   | Cut 'x' center of concrete headwall                             |
| 4.   | 123.80'  | Due S to NE 13-15-4 (Harrison)                                  |
| 5.   | 51.85'   | <del>PK nail w/shiner</del> E PwP#135-579 8"up<br>Mag nail w/bw |
| 6.   | 53.76'   | PKnail w/shiner SW PwPno# 4"up                                  |
|      |          |   |
|      |          |   |
|      |          |   |